



Our ENERGIN® GEN sets are highly efficient power generators that can operate both in island and mains parallel operation mode. The innovative design allows an easy and space-saving installation. All major components like gas engine generator unit, circulation pumps and control cabinet are factory mounted on a common frame.

The gas engines of the in-house M-series are the core of our units in the electrical power range of 115 - 500 kW. The engines are specially developed and manufactured by us for the use with different gases. In addition to natural gas and biogas, the engines can also run with LPG, wood gas and other special gases. For the latest engine generation, we rely on the modern 4-valve technology to provide even higher efficiency.

With an optional sound attenuating enclosure, that is mounted on the base frame, the sound pressure level can be reduced to less than 70 dB(A) in 1 m distance.


For customers with heat demand we recommend our ENERGIN® CHP or ENERGIN® GEN+ units.

	ENERGIN® type	Engine type	Electrical power	Electrical efficiency	Engine specification			
natural gas	M06 GEN G140	M06-GT0D41	140 kW	38,6 %	Bore	[mm]	130	
	M06 GEN G200	M06-GTID41	200 kW	41,0 %	Stroke	[mm]	142	
	M06 GEN G250	M06-GT2D41	250 kW	41,8 %	Speed	[min <sup>-1</sup> ]	1.500	
	M08 GEN G260	M08-GTID41	260 kW	41,0 %	Mean piston speed	[m/s]	7,1	
	M08 GEN G333	M08-GT2D41	333 kW	41,9 %	Applicable gas types	G = natural gas B = biogas P = propane and other high calorific gases H = woodgas and other low calorific gases		
	M12 GEN G400	M12-GTID41	400 kW	41,1 %	Aspiration	T = turbocharged		
	M12 GEN G500	M12-GT2D41	500 kW	42,1 %	Mixture cooling	0 = none I = internal 2 = double stage internal / external		
biogas	M06 GEN B140	M06-BT0D41	140 kW	39,3 %	Exhaust manifolds	D = dry, insulated		
	M06 GEN B200	M06-BTID41	200 kW	41,8 %	ENERGIN® type	M06	M08	M12
	M06 GEN B250	M06-BT2D41	250 kW	42,6 %	No. of cylinders / configuration	6 in V90°	8 in V90°	12 in V90°
	M08 GEN B260	M08-BTID41	260 kW	41,7 %	Displacement [dm <sup>3</sup> ]	11,3	15,1	22,6
	M08 GEN B333	M08-BT2D41	333 kW	42,6 %				
	M12 GEN B400	M12-BTID41	400 kW	41,9 %				
	M12 GEN B500	M12-BT2D41	500 kW	42,7 %				
LPG	M06 GEN P115	M06-PT0D41	115 kW	30,7 %				
	M06 GEN P173	M06-PTID41	173 kW	34,9 %				
	M06 GEN P205	M06-PT2D41	205 kW	35,8 %				
	M08 GEN P233	M08-PTID41	233 kW	35,0 %				
	M08 GEN P260	M08-PT2D41	260 kW	35,9 %				
	M12 GEN P350	M12-PTID41	350 kW	35,1 %				
	M12 GEN P450	M12-PT2D41	450 kW	36,0 %				
woodgas	M06 GEN H122	M06-HT2D41	122 kW	34,8 %				
	M08 GEN H166	M08-HT2D41	166 kW	34,9 %				
	M12 GEN H250	M12-HT2D41	250 kW	35,0 %				

## GEN Basic scope of supply

4-stroke gas engine coupled with double bearing alternator, mounted on common frame	●
Sound attenuating enclosure with air ventilation, mounted on common frame	○
Remote radiator for jacket water, lube oil and if applicable 1 <sup>st</sup> and 2 <sup>nd</sup> stage mixture cooling	○
ENERSCREEN® control system with 12" touch panel for engine, alternator and auxiliaries, set mounted in switchboard, with synchronizing and alternator protection functions	●
Generator circuit breaker, set mounted in switchboard	●
Lube oil system designed for long oil change intervals	●
Electric pre-lubrication pump with changeover valve	●
Exhaust silencer in single or two-stage design, supplied loose	○

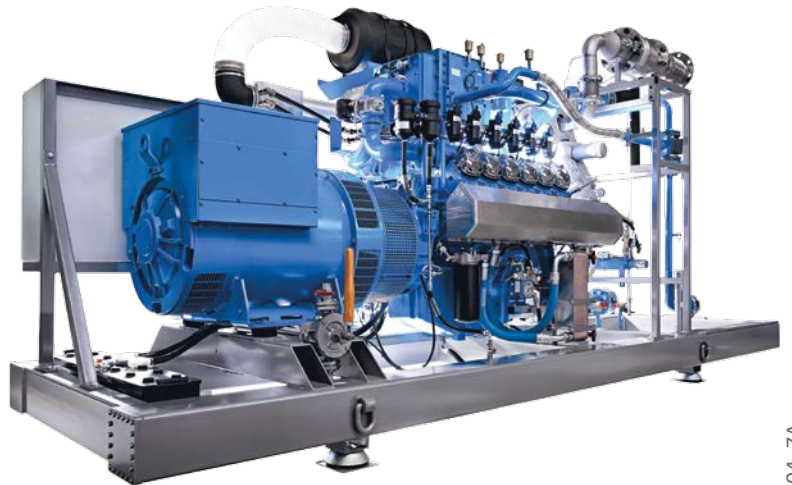

● included    ○ as an option



optional installation in container



© R Schmitt Enertec GmbH 11/2017

ENERGIN® and  are registered trademarks of and licensed by  GmbH. The use of other brands or trademarks contained in this document by a third party may result in a violation of the rights of the holders of the license plate. Subject to errors and technical modifications excepted.

www.energas.co.za  
sales@energas.co.za  
Phone: +27 011 397 6805/9



**R Schmitt Enertec GmbH**  
Siemensstraße 13  
56743 Mendig - Germany  
Phone: +49 2652 / 93 518 10  
Fax: +49 2652 / 93 518 22

**R Schmitt Enertec International FZCO**  
Apricot Tower, Office #804, PO Box 341299  
Dubai Silicon Oasis, DSO, UAE  
Phone: +971 4 333 57 24  
Fax: +971 4 333 91 33

www.rschmitt-enertec.com  
info@rschmitt-enertec.com

